

murano

TECHNICAL STANDARDS

Description	ASTM	ANSI	Result
Water Absorption	C-373	≤ 3%	≤ 0.1%
Break Strength (lbs.)	C-648	≥ 250 lbs	Min. 450 lbs
Scratch Hardness	MOH's Scale	N/A	5
Chemical Resistance	C-650	Unaffected	Unaffected
Frost Resistance	C-1026	Resistant	Resistant
Group	C-1027	N/A	5
Minimum Bond Strength (PSI)	C-482	≥ 50 lbs	Approx. 260
Shade and Texture Rating	V	N/A	V3
Coefficient of Friction/ Dry	C-1028	Varies	≥ 0.75
Coefficient of Friction/ Wet	C-1028	Varies	≥ 0.60

PRODUCT CHARACTERISTICS

- Monocaliber
- Contemporary and Stylish Look
- Easy to Clean and Maintain

APPLICATIONS

- Ideal for Commercial/Residential Applications
- Excellent for Upscale Foyers and Kitchens

We recommend a penetrating sealer for polished porcelains. Please follow your sealer manufacturer's guidelines for application and maintenance.

THROUGH-BODY, RECTIFIED, POLISHED PORCELAIN

murano




Roca Tile Group



murano

THROUGH-BODY, RECTIFIED, POLISHED PORCELAIN

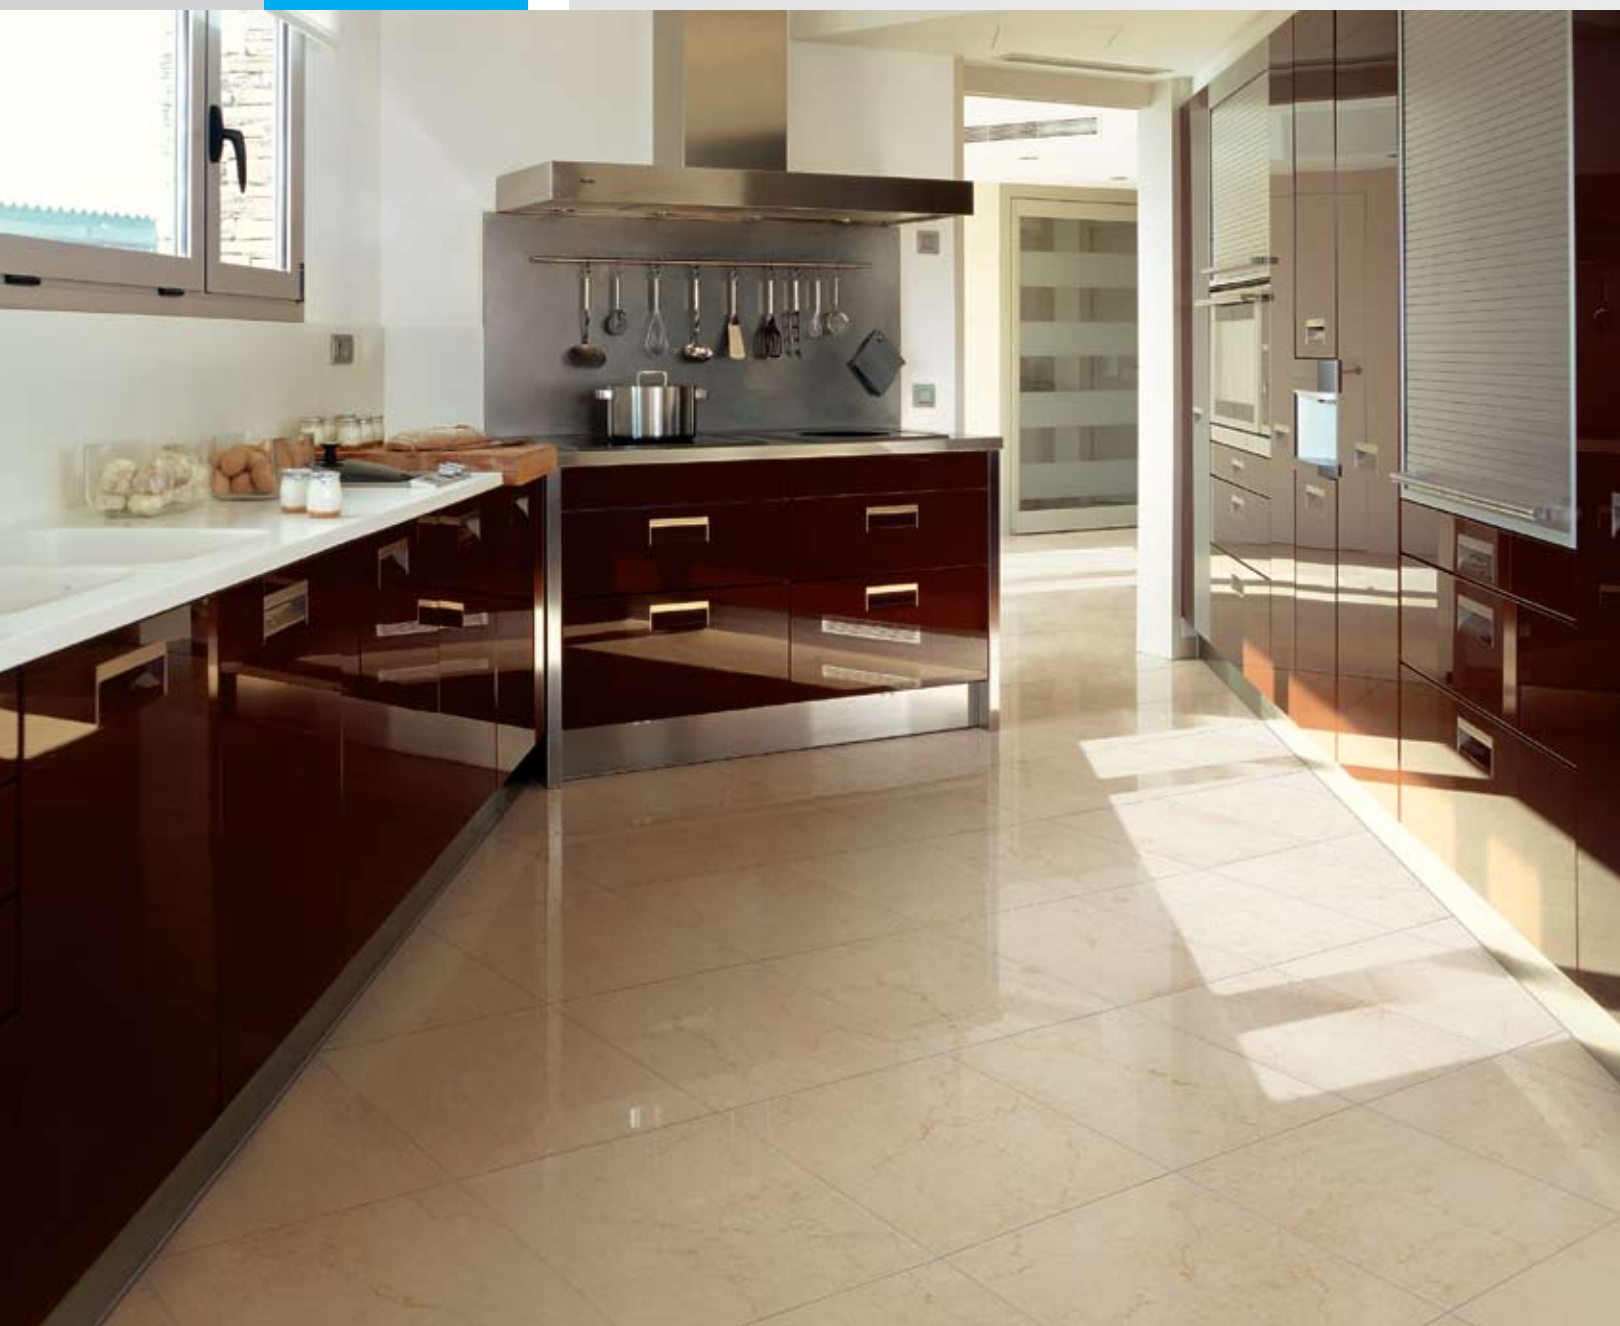

LIGHT GREY




18 x 18 (18 x 18)
LFMU660-18

BEIGE




18 x 18 (18 x 18)
LFMU661-18


NOCCE



18 x 18 (18 x 18)
LFMU662-18



MOSAIC
12 x 12
LFMU660-M



MOSAIC
12 x 12
LFMU661-M



MOSAIC
12 x 12
LFMU662-M